



## LLW : LED LINEAR WRAP

### DESCRIPTION

- Cost-effective and energy efficient 4ft LED utility wrap fixture
- 130 lumens per watt
- Ideal replacement for less efficient fluorescent wrap fixtures
- Features full length wrap-around U-shaped prismatic acrylic lens
- Universal 0-10V driver for continuous dimming standard

### LISTINGS

- DesignLights Consortium® Premium Qualified - meets the requirements for the highest DLC qualification for efficacy and lumen maintenance

### LED CHARACTERISTICS

- Rated lifetime L70: 50,000 hours
- 4000K CCT
- CRI: 80+
- 4160lm @ 32W : 130lpw
- 4420lm @ 34W : 130lpw
- 4608lm @ 36W : 128lpw
- 5200lm @ 40W : 130lpw
- 5334lm @ 42W : 127lpw

### ELECTRICAL

- Input voltage: 120-277V
- Dimmable power supply (0-10V)
- Power Factor: >.90
- THD: <20%

### CONSTRUCTION

- Durable steel body construction with white polyester powder coat finish
- -4°F to 122°F (-20°C to 50°C) operating temperature

### WARRANTY

- 5 year limited warranty; see eiko.com for warranty details

project name	type
catalog number	
comments	voltage
approved by	date



### APPLICATIONS

- Storage areas
- Utility rooms
- Schools
- Stairwell
- Workshops
- Corridors



## ORDERING INFORMATION

EXAMPLE: LLW-4C-40K-U


Model	Package	CCT	Voltage
LLW : LED Linear Wrap	<b>3C</b> - 32W; 4,160 lm <b>4C</b> - 36W; 4,608 lm <b>4CP</b> - 34W; 4,420 lm <b>5C</b> - 42W; 5,334 lm <b>5CP</b> - 40W; 5,200 lm	<b>40K</b> - 4000K	<b>U</b> - 120-277V

## PERFORMANCE SUMMARY

Order Code	Item #	Watts	Lumens	LPW	CCT	CRI	Volts	Fluor. Equiv.	DLC Premium
09425	LLW-3C-40K-U	32W	4,160	130	4000K	80+	120-277V	2 lamp F32T8	✓
09426	LLW-4C-40K-U	36W	4,608	128	4000K	80+	120-277V	2 lamp F32T8	✓
09704	LLW-4CP-40K-U	34W	4,420	130	4000K	80+	120-277V	2 lamp F32T8	✓
09427	LLW-5C-40K-U	42W	5,334	127	4000K	80+	120-277V	2 lamp F32T8	✓
09705	LLW-5CP-40K-U	40W	5,200	130	4000K	80+	120-277V	2 lamp F32T8	✓

✓DesignLights Consortium® Premium Qualified

## DIMENSIONS

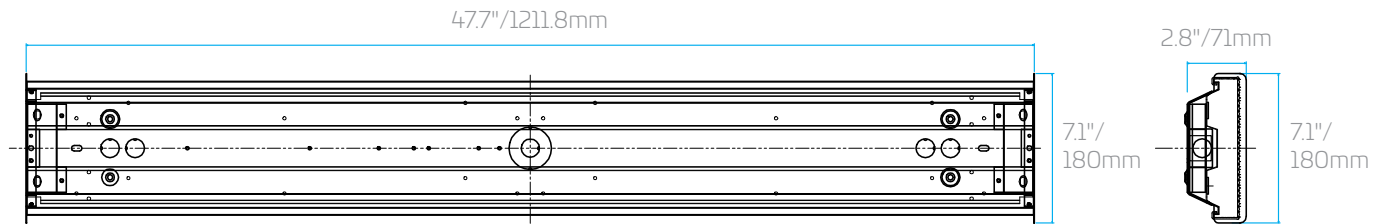


## AVAILABLE ACCESSORIES

Order Code	Item #	Description
09849	FHSCP-UNV-5WL	5W Emergency Battery Backup
09851	FHSCP-UNV-7.8WL	7.8W Emergency Battery Backup
09850	FHSCP-UNV-10.7WL	10.7W Emergency Battery Backup
09852	FHSCP-UNV-13.7WL	13.7W Emergency Battery Backup
09854	FHSCP-UNV-17WL	17W Emergency Battery Backup
09844	LLW-LENS	Replacement Lens for LLW Fixtures


## LLW-3C-40K-U

ZONAL LUMEN SUMMARY		
Zone	Lumens	%Fixture
0-30	1197	30
0-40	1976	49.9
0-60	3224	81.4
0-90	3783	95.5
90-180	220	5.5
0-180	4003	100
SPACING CRITERIA		
0-180	1.3	
90-270	1.3	
Diagonal	1.4	

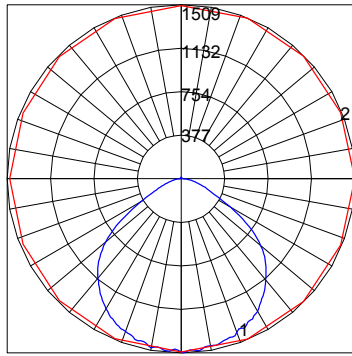

## LLW-4C-40K-U

ZONAL LUMEN SUMMARY		
Zone	Lumens	%Fixture
0-30	1305	30.1
0-40	2160	49.8
0-60	3524	81.2
0-90	4308	95.1
90-180	220	4.9
0-180	4528	100
SPACING CRITERIA		
0-180	1.3	
90-270	1.3	
Diagonal	1.4	

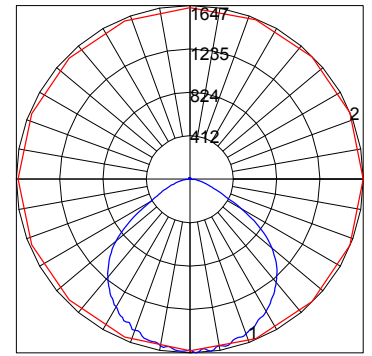

## LLW-5C-40K-U

ZONAL LUMEN SUMMARY		
Zone	Lumens	%Fixture
0-30	1335	26.5
0-40	2148	42.6
0-60	3672	72.9
0-90	4755	93.3
90-180	343	7.2
0-180	5098	100
SPACING CRITERIA		
0-180	1.2	
90-270	1.2	
Diagonal	1.3	

