



# CFP

## Contractor Select Flat Panel

Client: \_\_\_\_\_

Order #: \_\_\_\_\_

Project Name: \_\_\_\_\_

Type: \_\_\_\_\_ Qty: \_\_\_\_\_

### Performance Data

CRI

80+

CCT

4000K

### Projected Lifetime

L70 - 238,000 Hrs;

L80 - 149,000 Hrs

### Dimming

0-10V dimming standard,  
100% down to 10%

### Operating Temperature

-20°C to +50°C Ambient

### UL Listed

UL, Suitable for dry and damp locations



UL

Listed

DLC

Premium

10 Yr


Limited  
Warranty

### Description

The CFP is a contractor-focused LED flat panel luminaire that delivers the latest in high performance edge-lit LED technology for use in a variety of interior applications. Designed from the ground up for quick and easy installation in 2x2, and 2x4 conventional suspended grid ceilings for new construction or retrofit projects, the CFP features a low-profile modern design that is well-suited for offices, schools, hospitals, retail, and other commercial spaces. Next-generation thermal management of the LED driver and chipset components greatly extends the life of the fixture far beyond what is possible with existing fluorescent fixtures. While still emitting more than 80% of the original light output after 100,000 hours, the CFP flat panel luminaire will last several years without the need for costly replacement or maintenance.

### Features

- Recommended for offices, schools, hospitals, medical facilities and other commercial and institutional applications
- Delivers 125+ lumens per watt, 84+ CRI
- 0-10V Dimming Standard (10% to 100%)
- Suitable for Damp Locations, Type IC
- DLC Premium listed for utility rebates (see DLC matrix on Page 3)
- UL and cUL Listed for Insulation Contact (IC)
- CE Listed, RoHS compliant, FCC Compliant (Title 47 CFR Part 15)
- Mounting: Recessed lighting fixture (surface kit optional)
- Frosted diffuser lens for soft & dispersed illumination for comfort
- Power Factor >0.90; THD <20%
- 10-Year Limited Warranty



### Ordering Information

#### A FIXTURE SERIES

CFP Contractor Flat Panel LED Fixture

#### B SIZE

22	2 x 2
24	2 x 4
14	1 x 4

#### C WATTAGE/LUMENS (SIZE 22)

30 30W/3400<sup>1,2</sup>

#### (SIZE 24)

35 35W/4500<sup>1,2</sup>

#### (SIZE 14)

30 30W/3500<sup>1,2</sup>

#### D CCT

40 4000K

#### E VOLTAGE

UNV 120-277V


#### F OPTIONS

SMK Surface Mount Kit

<sup>1</sup> Delivered Lumens (4000K)

<sup>2</sup> DLC Listed Wattage (see Page 3 for more info on models currently listed)


**Dimensions**

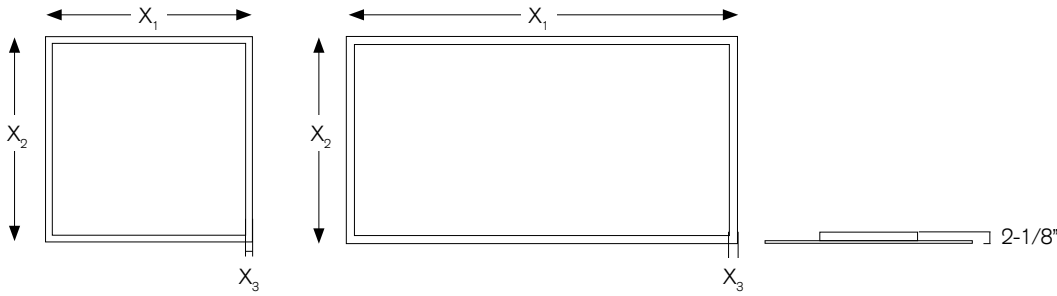

	Inches	
	Size: 2 x 2	Size: 2 x 4
<b>X<sub>1</sub></b>	23.75	47.75
<b>X<sub>2</sub></b>	23.75	23.75
<b>X<sub>3</sub></b>	0.875	0.875

**Photometrics**


Model 2x2 30W 4000K

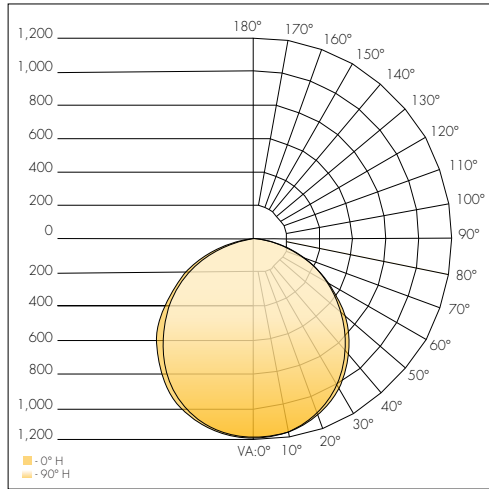

Zonal Lumen Summary

Zone	Lumens	%Luminaire
0-30	911.9	27.2%
0-40	1,496.5	44.7%
0-60	2,639.5	78.8%
60-90	702.1	21%
70-100	297.3	8.9%
90-120	2.3	0.1%
0-90	3,341.6	99.8%
90-180	6.2	0.2%
0-180	3,347.8	100%

Model 2x4 30W 4000K

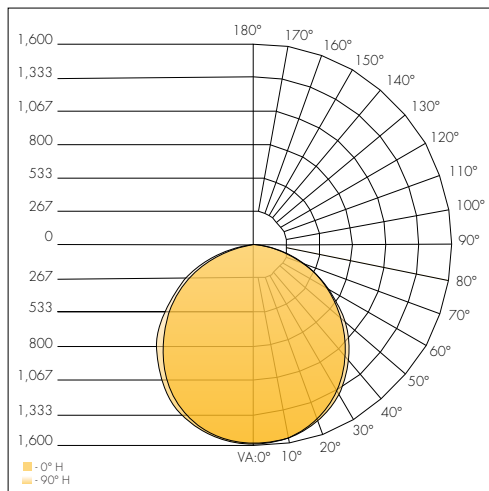

Zonal Lumen Summary

Zone	Lumens	%Luminaire
0-30	1,222.3	27.1%
0-40	2,005.8	44.5%
0-60	3,538.5	78.6%
60-90	938.7	20.8%
70-100	397.3	8.8%
90-120	9.8	0.2%
0-90	4,477.2	99.4%
90-180	26.0	0.6%
0-180	4,503.2	100%

**DLC Listed**

	1x4	2x2	2x4
	30W	30W	35W
4000K	X	X	X

All Sizes

